


SAE 100 R8 EN855 - 0600111

TERMOPLASTICO COSTRUZIONE

- **sottostrato:** poliestere termoplastico
- **rinforzo:** due tercce in fibra aramidica
- **copertura:** poliestere termoplastico color nero

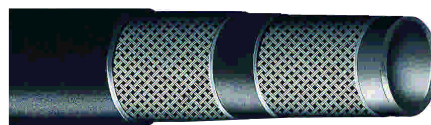

DN			ref.					A	B			
mm	dash	inches	0600111	mm	mm	mm	bar	p.s.i.	bar	bar	mm	g/m
5	-3	3/16	05	5	-	9,5	345	5000	1600	1380	40	56
6	-4	1/4	06	6,5	-	11,9	345	5000	1500	1380	50	86
8	-5	5/16	08	8,2	-	14,3	350	5000	1400	-	60	119
10	-6	3/8	10	9,8	-	16,5	276	4000	1300	1100	75	151
12	-8	1/2	12	13,1	-	20,4	241	3500	980	965	95	213

-40°C + 93°C
-40°F + 200°F

142

TERMOPLASTIC CONSTRUCTION

- lining: thermoplastic polyester
- reinforcement: two aramidic braids
- cover: polyester thermoplastic black colour

KUNSTOFFAUFBAU

- Seele: Kunststoff aus Polyester
- Druckträger: zwei hochfeste Aramid-Drahtgeflechte
- Decke: Polyurethan Schwarze Farbe

THERMOPLASTIQUE CONSTRUCTION

- tube intérieur: polyester thermoplastique
- renforcement: deux tresses en aramid
- robe extérieure: polyester thermoplastique

TERMOPLASTICOS CONSTRUCCION

- tubo interior: tubo de poliester
- refuerzo: dos trenzas fibra de aramide
- cubierta exterior: poliester termoplastico color negro